




# MS501

**L5**

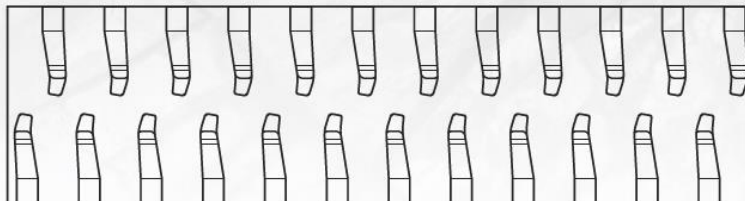

**The MS501's extra deep L5 tread design provides excellent traction in tough underground mine applications.**

- Wear and cut resistant tread compound.
- Extra deep L5 traction pattern.
- Optimal durability for prolonged tyre life.
- Excellent traction and flotation.
- Minimal vibration and excellent stability.

SIZE	STAR RATING	TYPE	RIM	O.D.	S.W.	TREAD DEPTH	INFL. P.	L.C.C (LBS/KG)	LOAD & SPEED
				In	In	32nds	psi	5mph	
				mm	mm	mm	Kpa	10kph	
29.5R25	**	TL	25.00/3.5	75.9	30.4	117	94	49400	216A2
				1928	772	93	650	22400	

E&OE. All measurements are based on Maxam and industry standards. Physical tyre measurements may vary slightly.